


# ZLX-15-G2 15" 2-way passive speaker

## ZLX

- ZLX-G2 is the next generation of the best-selling pro-audio loudspeaker series from Electro-Voice
- Increased maximum SPL output and extended frequency response
- Robust and ergonomic design for day-to-day durability and portability
- Recommended to use with Dynacord DSP power amplifiers
- SONICUE integration - optimized speaker settings for best performance

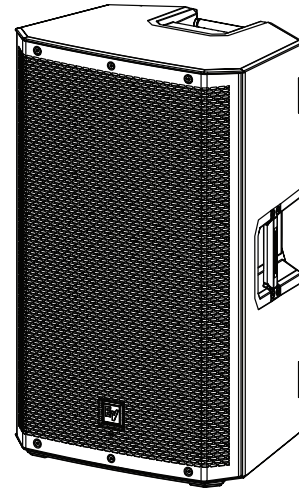

The new ZLX-G2 professional audio loudspeaker series is the next generation of the best-selling speakers from Electro-Voice, which raises the standard for performance and features in its class.

The ZLX-G2 series is offered in 15-inch, 12-inch, and new 8-inch woofer sizes, both powered and passive variants.

ZLX-G2 loudspeakers offer the best-in-class acoustic output. Electro-Voice-patented Signal Synchronized Transducers (SST) baffle design ensures improved bass, small size, and even coverage across all frequencies.

ZLX-G2 series features a 55-degree monitor angle. 12 and 15-inch models additionally include a “kickback” 25-degree monitor angle.

ZLX-15-G2 uses industry standard NL4 connections. The two NL4 connectors are in parallel and pass through all pins.

For optimal acoustics and performance, ZLX-15-G2 is recommended to be used with a Dynacord DSP power amplifier programmed with the appropriate speaker settings included in the EV Speaker Database for SONICUE.

ZLX-G2 series accessories such as padded covers, a U-bracket for mounting 12- and 15-inch models, and universal wall-mount brackets compatible with all models are available.

## Parts included

Quantity	Component
1	Loudspeaker
1	Power cord

Quantity	Component
2	Safety and security information
1	Quick user guide



## Technical specifications

Frequency response (-3 dB) (Hz) <sup>1</sup>	68 Hz – 18,000 Hz
Frequency range (-10 dB) (Hz) <sup>1</sup>	53 Hz – 20,000 Hz
Axial sensitivity (dB SPL 1W/1m)	95 dB SPL 1W/1m
Maximum sound pressure level at a distance of 1 m (dB) <sup>1</sup>	126 dB
High pass frequency (Hz)	40 Hz
Crossover frequency (kHz)	2 kHz
Coverage angle HxV (°)	90° x 60°
Power handling (continuous) (W)	250 W
Power handling (peak) (W)	1,000 W
Nominal impedance (Ω)	8 Ω
LF transducer	WECA2158
LF transducer size (in)	15 in
LF transducer magnet material	Ferrite
HF transducer	DH-1K
HF transducer type	Compression driver
HF transducer size (in)	1.4 in
HF transducer diaphragm material	Titanium
Dimensions (H x W x D) (mm)	697.6 mm x 422.8 mm x 383.1 mm
Dimensions (H x W x D) (in)	27.46 in x 16.65 in x 15.08 in


Shipping dimensions (H x W x D) (mm)	765 mm x 490 mm x 490 mm
Shipping dimensions (H x W x D) (in)	30.12 in x 19.29 in x 19.29 in
Weight (kg)	16.44 kg
Weight (lb)	36.24 lb
Shipping weight (kg)	19.18 kg
Shipping weight (lb)	42.28 lb

1) With recommended preset


**Frequency response:**

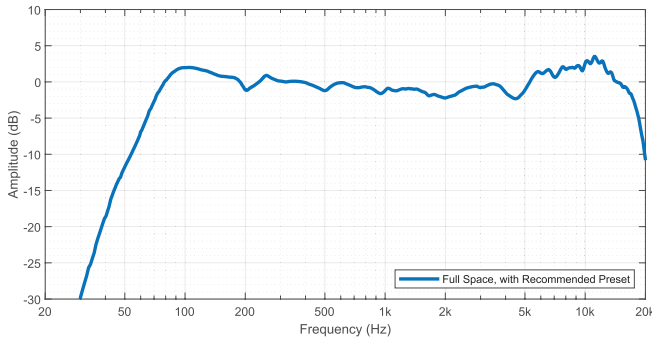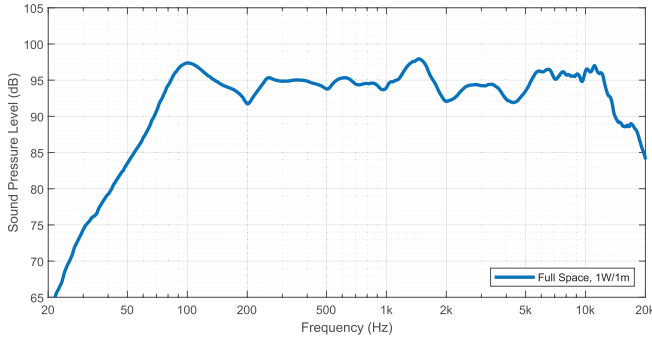

**Impedance:**

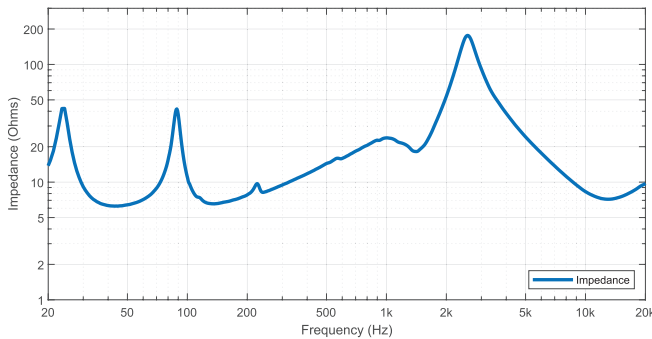

**Dimensions:**

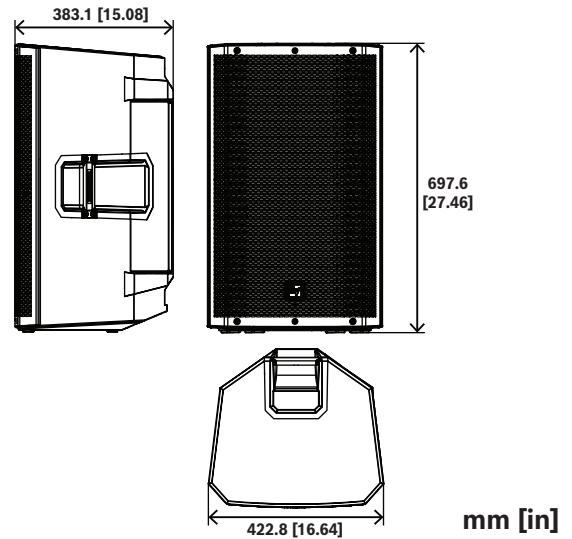

**Ordering information**

**ZLX-15-G2 15" 2-way passive speaker**  
 Passive 15-inch 2-way loudspeaker, black  
 Order number **ZLX-15-G2 | F.01U.385.532**

**Accessories**

**ZLX-15-G2-CVR Padded cover for 15" ZLX-G2 models**  
 Padded cover for 15-inch ZLX-G2 loudspeaker models, EV logo, black  
 Order number **ZLX-15-G2-CVR | F.01U.385.535**

**ZLX-G2-BRKT Wall mount bracket, ZLX G2 2-way mode**  
 Wall mount bracket for 12-inch and 15-inch ZLX-G2 loudspeakers, black  
 Order number **ZLX-G2-BRKT | F.01U.398.947**

**BRKT-POLE-L Wall mount bracket 12", 15" 2-way speaker**  
 Pole mount bracket for loudspeakers up to 15 inches, black  
 Order number **BRKT-POLE-L | F.01U.385.537**

**Represented by:**

**Germany:**  
 Bosch Sicherheitssysteme GmbH  
 Robert-Bosch-Ring 5  
 85630 Grasbrunn  
 Germany  
 www.electrovoice.com

Bosch Security Systems, LLC  
 12000 Portland Avenue South  
 Burnsville MN 55337  
 USA