

WiLD-14

WIRELESS PRO AUDIO

WiLD Series RX Rail-mount Loudspeaker



PRODUCT OVERVIEW

WiLD-14 is a self-powered 4" lamp style loudspeaker with wireless audio reception under the control of the transmitter WiLD-TX, featuring an installation system which is compatible with ceiling light rails. WiLD is the ultimate long-distance wireless audio solution. Designed for retail spaces, museums, and other markets, WiLD offers a cost-effective, robust, and user-friendly installation that blends seamlessly into any environment. Experience superior sound quality with minimal visual impact. Upgrade to WiLD today and transform your audio experience!

KEY FEATURES

- Lamp style self-powered WiLD receiver, including 4" woofer and 0.75" tweeter loudspeakers.
- Lighting rail mount compatible (Compatible light rails: 4 wire 3 circuit track system such as Global Trac Pro or compatibles).
- Universal internal power supply, taking mains AC from the lighting rail bracket (100-240VAC 50-60 Hz).
- 1x WiLD wireless audio signal received, from the transmitter it is paired to.
- Rear panel WiLD PAIR button that allows pairing the receivers to the transmitter quickly and easily.
- LED indicator on the rear panel.
- Recommended maximum range from a WiLD-TX transmitter to any WiLD paired receiver: 150 metres, with direct line of sight.
- Available in white (RAL 9003) and black (RAL 9005).

APPLICATIONS

- Retail
- Hospitality
- Education
- Corporate
- Sport & Wellness

ACCESSORIES AND COMPATIBLE DEVICES

- WiLD-TX



- TUBESMA: Optional Surface mount accessory



TECHNICAL SPECIFICATIONS

WiLD-14

WiS (RF Wireless Digital Audio)		
Frequency band	1880 - 1930MHz,EU DECT, US DECT	
Coverage range	Up to 150m from a TX to any paired RX, direct line of sight	
Audio channels	1 stereo audio ch received from the WiLD-TX network	
Audio transmission	16 bit uncompressed, 48kHz SR	
Digital Audio Sample size	16bit	
Digital Audio Sampling rate	48kHz	
Digital Audio Frequency Response	10Hz – 15kHz (-1dB)	
Digital Audio converters	ADC Resolution: 24 bits Dynamic range ADC: 96 dB	
Latency	From TX Analog Audio IN to RX Speaker <26ms	
Pairing time	Up to 60s	
System		
Effective Freq. Range ¹	63Hz-20kHz (-10dB)	
Coverage angle ²	320°	
Sensitivity ³	86 dB (1W/1m)	
Maximum SPL ⁴	102 dB continuous / 108 dB peak	
Transducers		
Ways	2 ways	
Low frequency driver	4" woofer	
High frequency driver	0.75" tweeter	
Nominal impedance	4Ω	
Powered		
Power	40 W RMS / 160 W Peak	
Audio inputs	Wireless Audio: Digital, Mono	
Audio outputs	Internal Loudspeaker: Analogue, Mono, Self powered	
THD + Noise	<1% @1kHz Full power	
Signal Noise Ratio	>90.5dB @30W RMS	
Input sensitivity	0dBV / 10kΩ	
Electrical		
Power supply	Universal, internal power supply	
AC mains requirement	100-240VAC @ 50-60Hz	
AC mains connector	From lighting rail bracket	
Power consumption	30W (rated)	
Power consumption standby	<2W	
Monitoring and Control		
Other controls	PAIR / UNPAIR: via Panel button	
LED Indicators	Status	
Communication interfaces	USB-C Service & firmware updates	
Physical		
Connection type	Ceiling rail AC connection	
Installation options	Ceiling light rails, or suface using TUBE SMA	
Enclosure material	ABS	
Grille material	Metal	
Mounting system	Lighting rail mount compatible	

Pan and tilt wall-mount	Swivel (pan and tilt)
Rail fixing system	4 wire 3 circuit track system compatible
Compatible rail systems	Global Trac Pro or compatibles
Operating temperature	Min: -10°C ; 14°F Max: 40°C ; 104°F
Operating humidity	<85% HR
Storage temperature	Min: -10°C ; 14°F Max: 50°C ; 122°F
Storage humidity	<90% HR
Included accessories	Lighting rail mount
Optional accessories	Surface mount accessory (TUBE SMA)
Finished colour	White (RAL 9003) or black (RAL 9005)
Dimensions (ØxD)	128.6 x 205.3 mm / 5.06 x 8.08 in.
Weight	1.5 kg / 3.3 lb
Pieces per box	1 unit
Shipping dimensions (WxHxD)	385 x 178 x 165 mm / 15.16 x 7.01 x 6.50 in.
Shipping weight	2.2 kg / 4.85 lb


¹10dB below the sound pressure level at specified sensitivity

²6dB below the sound pressure level than that at the direction of maximum level. Max. angle between 1 kHz and 4 kHz.


³Measured on-axis, far field and referenced to 1 meter by inverse square law. Average from 100 Hz to 10 kHz.

⁴Calculated from sensitivity and power handling specifications, exclusive of power compression

FREQUENCY RESPONSE ON-AXIS

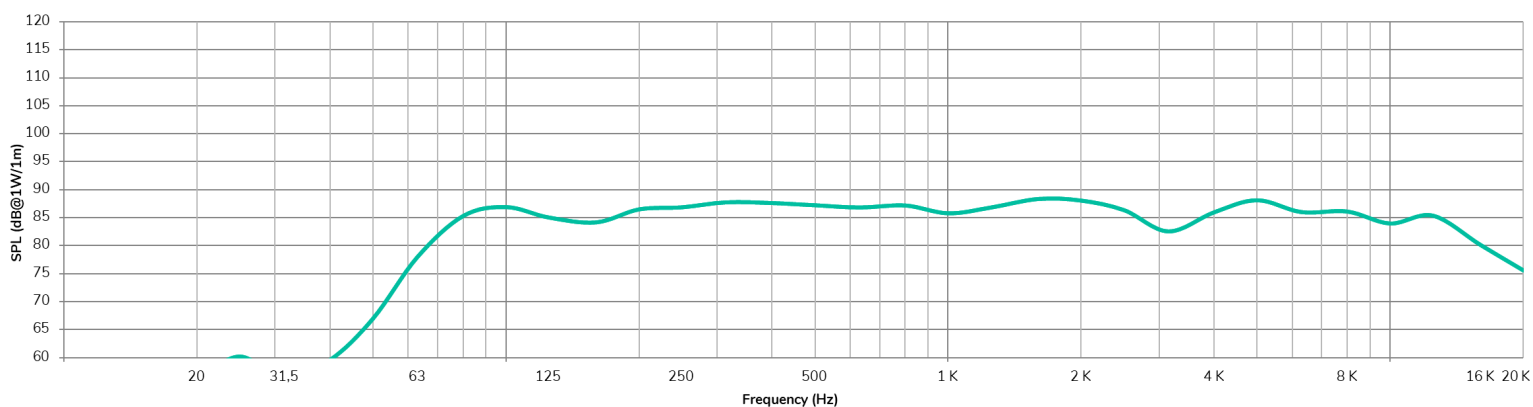


POLAR DIAGRAM

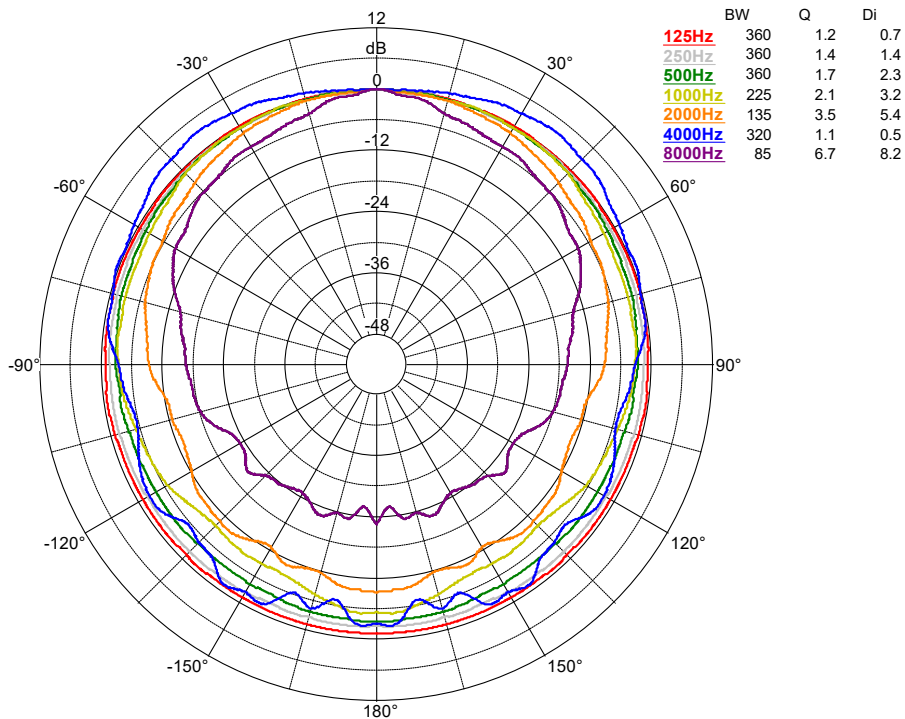

MECHANICAL DIAGRAM



Ecler WILD-14 Mechanical Diagram

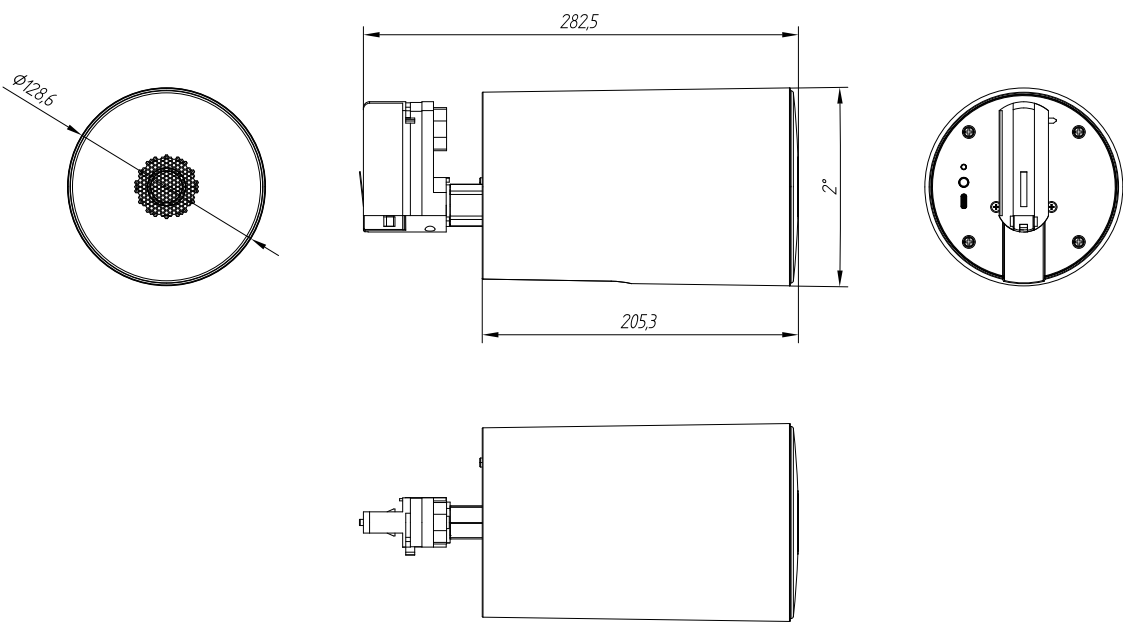

All the measurements are in mm

6I-1171-0100

www.ecler.com



All product characteristics are subject to variation due to production tolerances. NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical queries contact your supplier, distributor or complete the contact form on our website, in [Support / Technical requests](#).

Motors, 166-168 - 08038 Barcelona - Spain | Tel. (+34) 932238403 | information@ecler.com | www.ecler.com