





# IPD-XT850 | Install Instructions For: IPD-XT850

1.435.647.9555 | 800.647.TUBE | www.soundtube.com


### Box contents

- 1 In-ground speaker
- 1 in-ground/security bracket (2 pieces)
- 1 Liquid-tight RJ45 coupling compression fitting
- 1 Square drive bit
- 6 #8 stainless-steel square-drive screws
- 2 .75" 1/4-20 Stainless-steel bolts

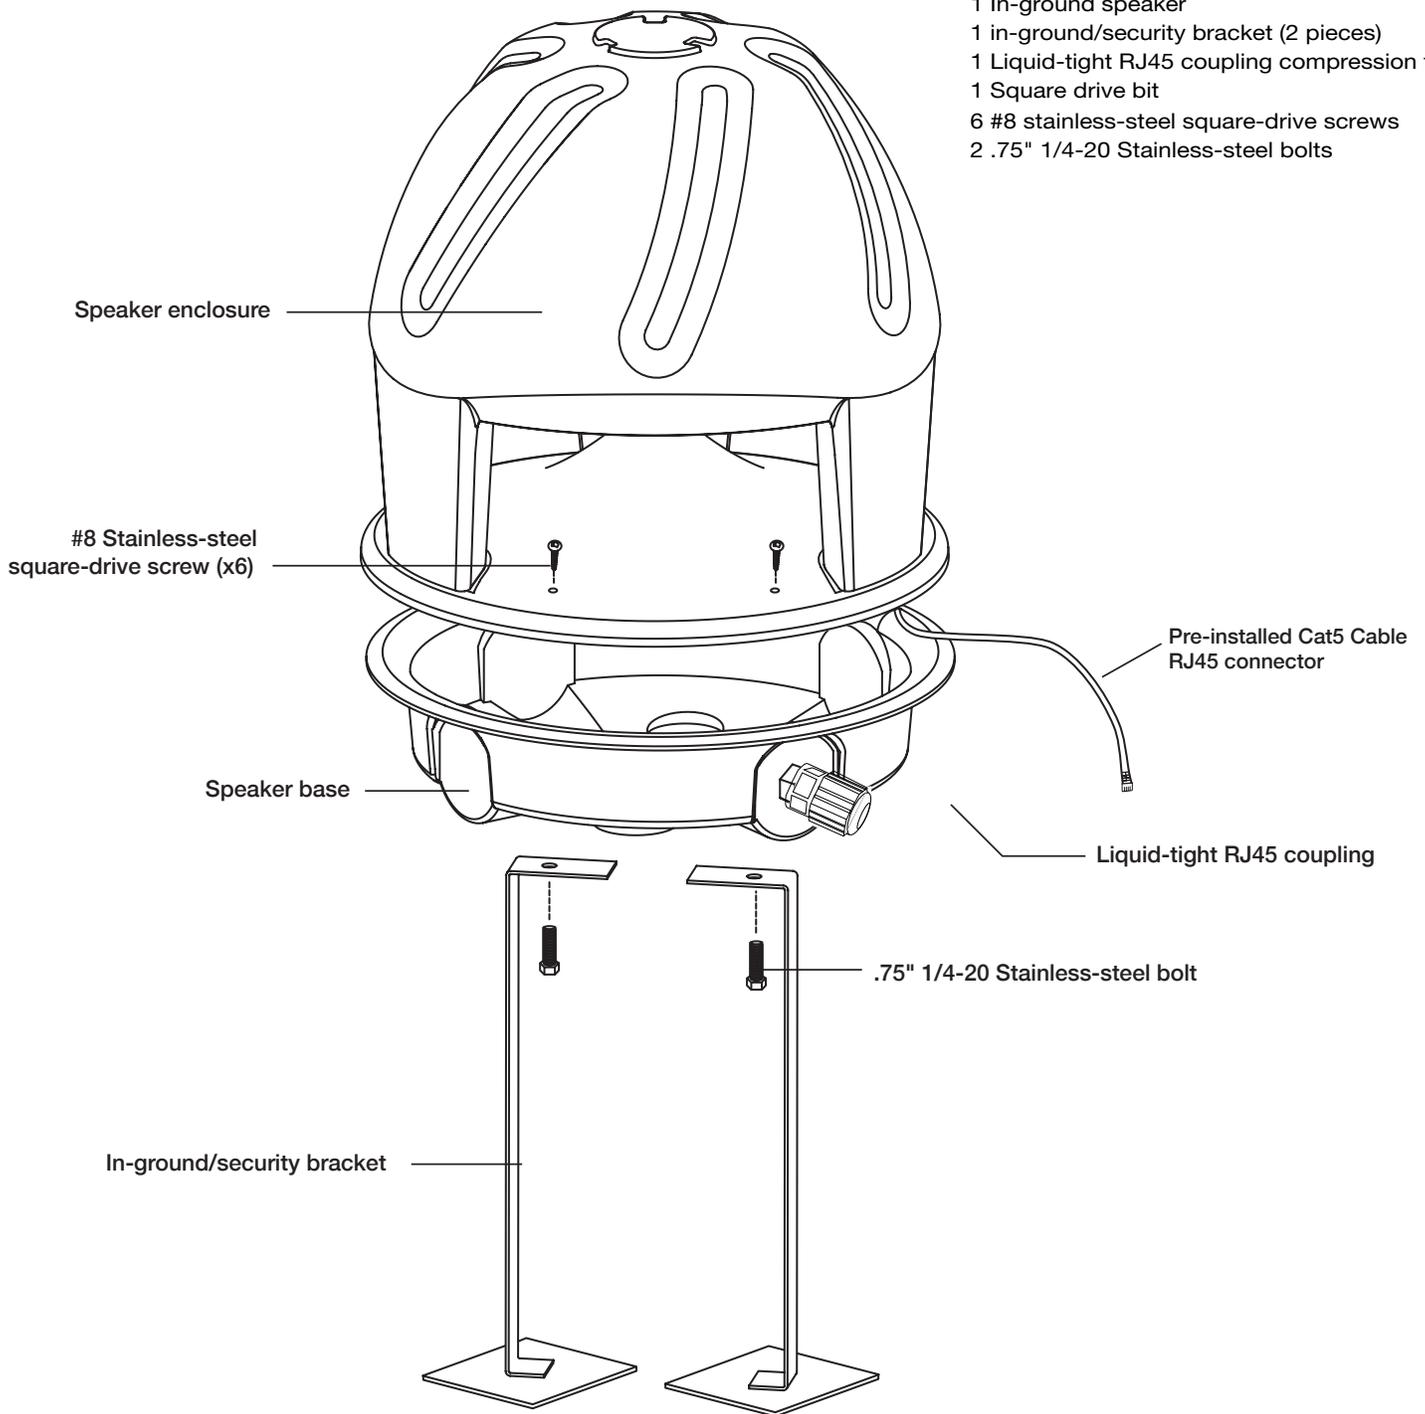


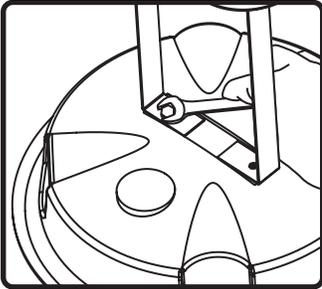


1. Attach inground/security brackets to speaker base using stainless-steel bolts.

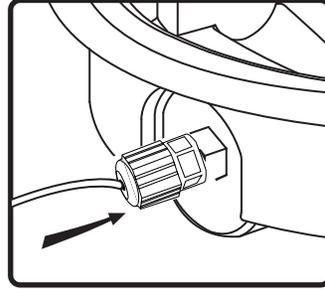


2. Field route Cat5 cable from the switch to each IPD-XT850, direct burial cable or use of conduit is required. The cable may need to be terminated after routing the cable through the compression fitting of the liquid-tight RJ45 coupling. Tighten fitting to seal.

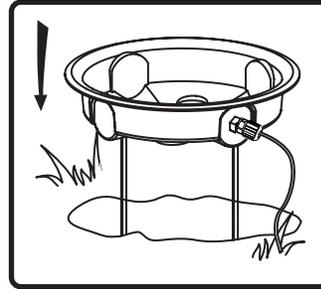


3. Dig a hole that is 15" wide and 5" deep. Place speaker base into the hole in the ground with the top rim of the base at ground level. Back-fill dirt into hole. For added security, cement security brackets into ground.

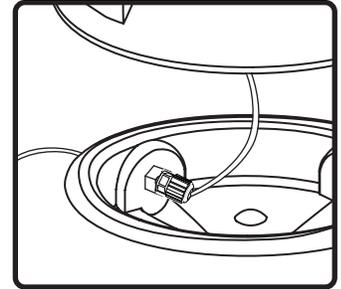

4. Plug Cat5 cables into coupling. No wire nuts needed. Tighten fitting to seal.

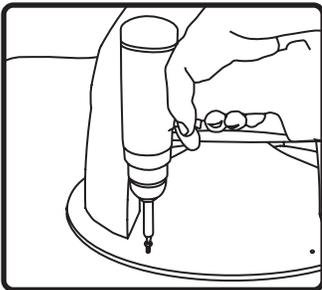

5. Set speaker enclosure on speaker base. Use tamper-resistant stainless-steel screws to attach speaker to base (driver tip and screws provided).

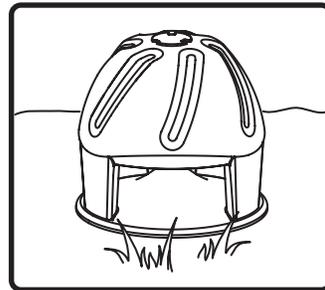

6. Done!

## Additional Information

Software and firmware updates for SoundTube Dante-enabled speakers can be found on our website. Go to [www.mseaudio.com/downloads](http://www.mseaudio.com/downloads) and navigate to SoundTube and download the necessary software for your IPD-XT850 speaker.



### Warning

SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.